


# Installation Instructions

## IMPORTANT NOTICE

• The front surface of this product incorporates the use of gel coats which **WILL** chalk, fade and yellow at a faster rate than today's paint systems. Painting is **STRONGLY** recommended to assure that the aesthetics of the product are maintained throughout the vehicle's life cycle. In order to assure proper paint adhesion, you **MUST** thoroughly sand both the front and back sides of the deflector. The installation brackets provided with this product has a baked-on powder coat finish to resist corrosion. If you are going to paint this hardware, it must be scuff sanded to assure adhesion.

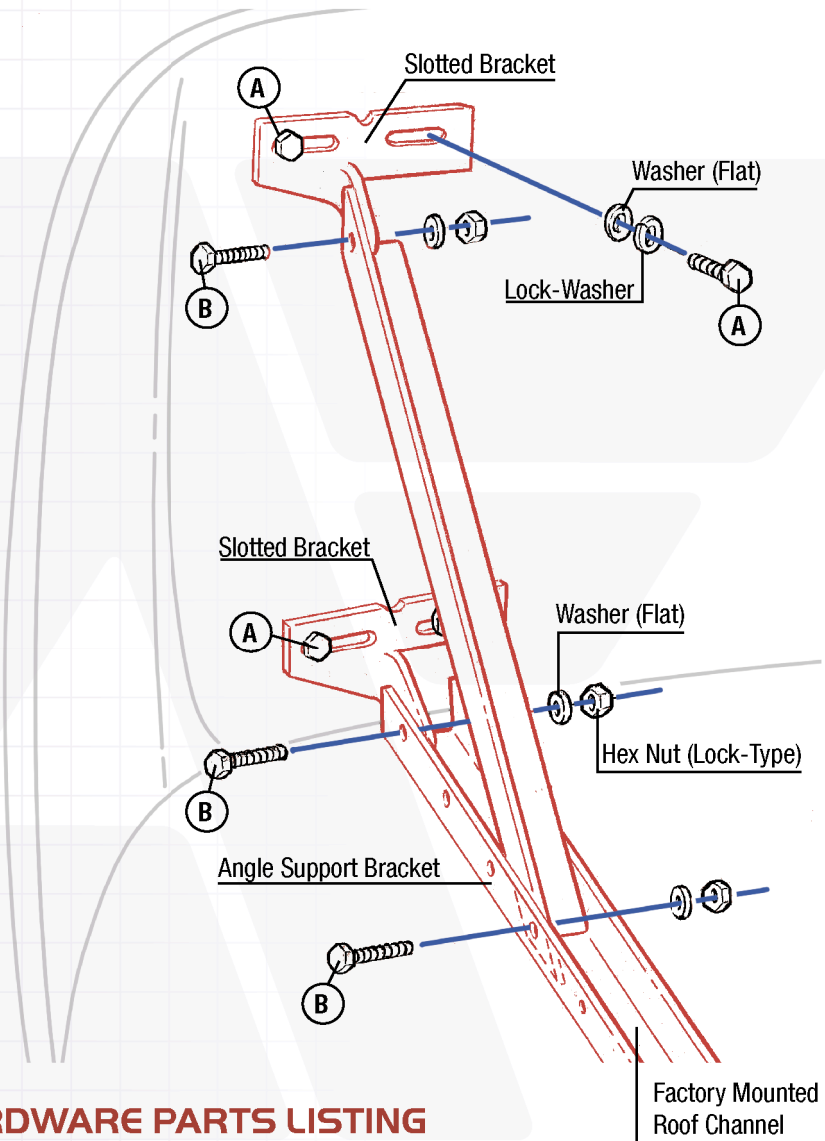

## UNIVERSAL DEFLECTOR HARDWARE PARTS LISTING

PART #	QTY	PART DESCRIPTION
SC009	8	Hex Bolt with Nylon Patch ————— 3/8" – 16 x 3/4"
	6	Hex Bolt ————— 3/8" – 16 x 1"
	6	Hex Nut (Lock Type) ————— 3/8"
	14	Washer (Flat) ————— 3/8"
	8	Washer (Lock) ————— 3/8"
4	Universal Deflector Slotted Bracket	
2	Universal Deflector Angle Support Bracket	

- A** (8 LOCATIONS)  
 3/8" – 16 x 3/4" Hex Bolt  
 WASHER (LOCK) : WASHER (FLAT)
- B** (6 LOCATIONS)  
 3/8" – 16 x 1" Hex Bolt  
 WASHER (FLAT) : HEX NUT (LOCK-TYPE)